


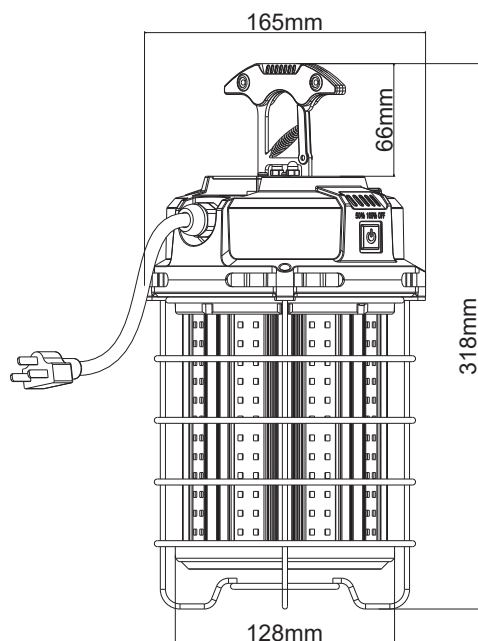

Specifications TLWLC150P

Electrical Specifications

Model no.	TLWLC150P
Power (W) $\pm 10\%$	150 W
Input voltage (V)	AC120V, 50/60Hz
Efficacy $\pm 3\%$	120 lm/W
Power factor (PF)	0.9

Photometric Specifications

CRI	80
CCT	5 000 K
Beam angle	360°
Light output $\pm 3\%$	18 000 lm
Dimmable	No

Mechanical Specifications

IP rating	Damp locations
Material	PC / Aluminum / Stainless steel
Lens	Clear PC
Net weight	N/A
Product size (mm)	$\pm \varnothing 165 \text{ mm} \times 318 \text{ mm}$
Product size (inch)	$\pm \varnothing 6.5" \times 12.5"$
Operating temperature	-40°C ~ 60°C
Operating humidity	10% ~ 90%
Lumen maintenance	>80% at 100 000 hours

Product Description:

- Stainless steel guard for safety protection. Can be used directly on the floor.
- Integrated NEMA5-15R receptacle. Can connect in series up to 4 pieces.
- With approximately 35 ft power cord. ($\approx 10\,668 \text{ mm}$)
- 50% / 100% / OFF switch.
- Portable hook. Easy to carry and install.
- Long lifespan up to 50 000 hours.
- Replacement for 400 W MH traditional temporary lamp.
- 10 000 V high voltage surge protection.
- Other CCT available on special request.

Applications:

Construction areas, temporary site, different scale working places, repair workshop, warehouse, indoor and outdoor etc.